Fidek FBR-061MV

1.Steps preparing for fixing the speaker

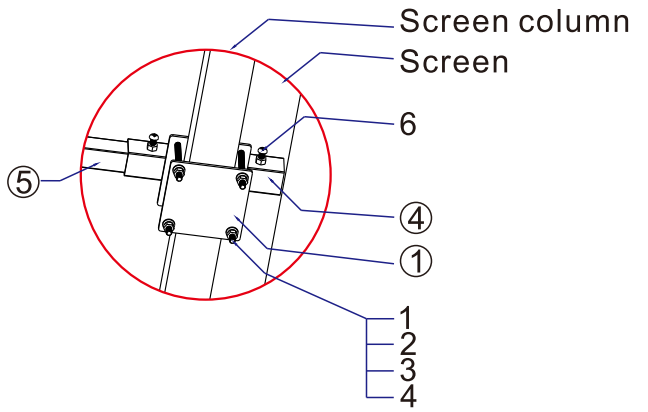

(1):Use 1/2/3/4 to fix bracket A and B together on the screen column

(2):Use 6 to fix bracket E and D together

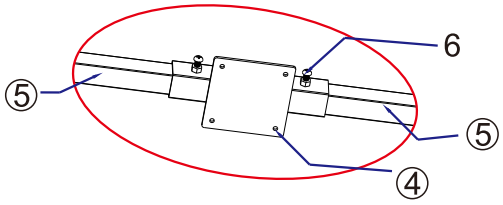

Fix the 2 pieces of bracket E together by bracket D

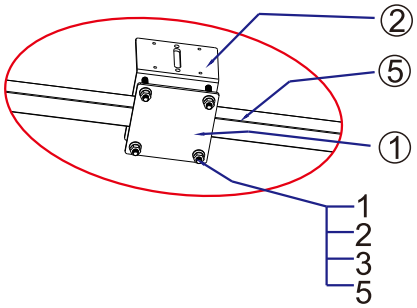

Use 1/2/3/5 to fix bracket A and B together onto bracket E

Accessory list

①x2	②x1	③x1	④x1	⑤x1
				
Bracket A	Bracket B	Bracket C	Bracket D	Bracket E

1 x8	2 x8	3 x8	4 x4	5 x4	6 x3	7 x4	8 x2	9 x2
Nut (M6)	Gasket Ø 6.5	Spring pad Ø 6.5	Screw (PM6x75)	Screw (PM6x45)	Screw (BM6x15)	Screw (KM6x16)	Screw (PWA4x15)	Triangle-headed screw(M6)

Fidek FBR-061MV

2:Different situations

Principle: the front of the speaker should cling closely to the screen. Choose different fixing method according to the different distance between the column and the screen.

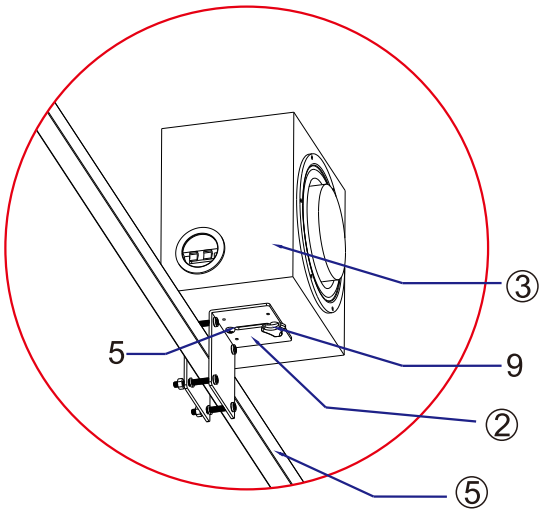

Situation 1: Use 5 and 9 to fix the Speaker on bracket B.

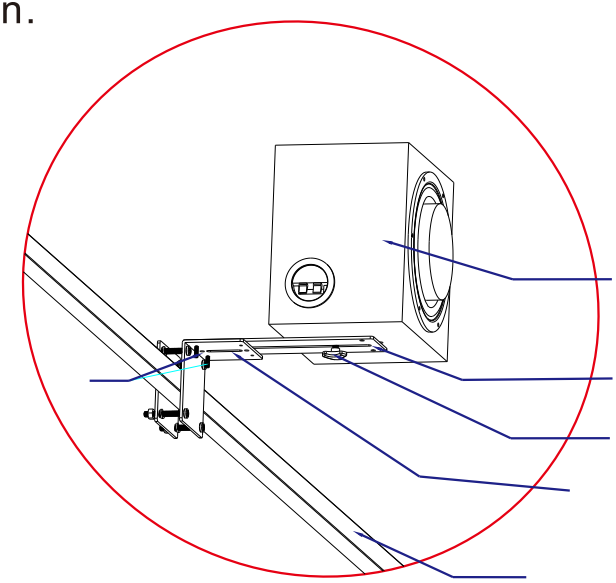

Situation 2:
a: use 7 to fix bracket C on bracket B.
b: use 9 to fix the speaker on a suitable position of bracket C.

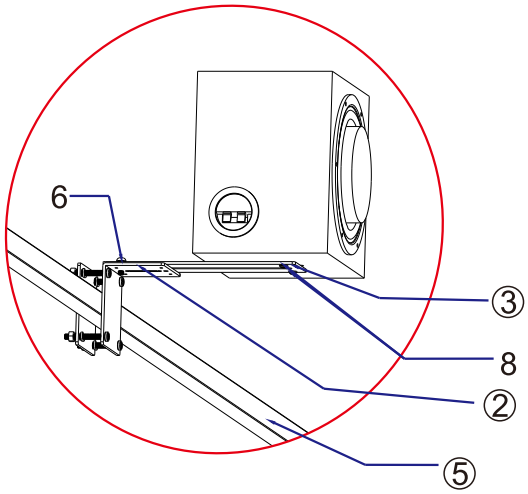

Situation 3:
a: use 6 to fix bracket C on bracket B.
b: use 8 to fix the speaker on a suitable position of bracket C.